


HazMat Defender® Pads #YPB50M - 15" x 19", 50 pads/package

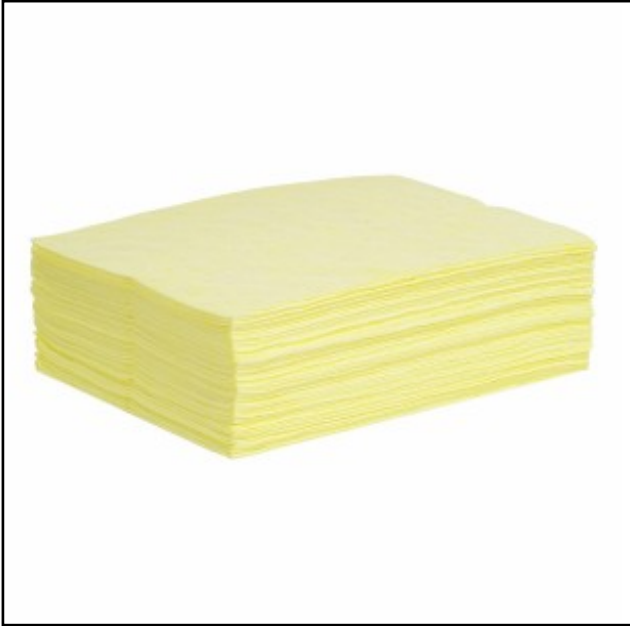

Economical choice for quick, efficient response to spills of hazardous or unknown liquids.

- Economical mat pad for aggressive chemical spills or unknown liquids
- 100% polypropylene mat is chemically compatible with most liquids
- Color-coded in cautionary yellow for quick identification
- Use for spill cleanup in university and research labs, hospitals, chemical or pharmaceutical plants and other facilities that use hazardous liquids

YPB50M Specifications

| | |
|-----------------------------|------------------------------|
| Dimensions: | 15" W x 19" L |
| Shipping Dimensions: | 15" W x 19" L x 7" H |
| Sold as: | 50 pads per package |
| Color: | Yellow |
| Composition: | Polypropylene |
| Absorbency: | Up to 12.35 gal. per package |
| Absorbency per: | Up to 31.62 oz. per pad |
| Weight: | 5.2 lbs. |
| # per Pallet: | 48 |
| Basis Weight: | MediumWeight |
| Incinerable: | Yes |
| Ship Class: | 175 |

Metric Equivalent Specifications

| | |
|-----------------------------|--------------------------------|
| Dimensions: | 38.1cm W x 48.3cm L |
| Shipping Dimensions: | 38.1cm W x 48.3cm L x 17.8cm H |
| Absorbency: | Up to 46.7 L per package |
| Absorbency per: | Up to 935 mL per pad |
| Weight: | 2.4 kg |

YPB50M Technical Information

Warnings & Restrictions:

There are no known warnings and restrictions for this product.

Regulations and Compliance:

49 CFR 173.3(c)(2) - The area between a container and a salvage drum used for overpacking must have "sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed."

40 CFR 263.31 - Transporters, "must clean up any hazardous waste discharge that occurs during transportation...so that the hazardous waste discharge no longer presents a hazard to human health or the environment."

29 CFR 1910.1450(e) - OSHA requires containment and cleanup materials for spills in laboratories to reduce occupational exposure to hazardous chemicals.

29 CFR 1910.120(j)(1) - Under an OSHA requirement, "DOT-specified salvage drums or containers and suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks, or ruptures may occur."

Technical Documents:

(Available at spilltech.com)

Product Data Sheet (PDS)

Safety Data Sheet (SDS)

Chemical Compatibility (CCG)



SpillTech

Online:
spilltech.com

Phone:
1-800-228-3877 (N.Am.)
1-770-475-3877 (Other)

Fax:
1-800-872-3764 (N.Am.)
1-770-410-1812 (Other)

Email:
sales@spilltech.com